

ARTISTRY – ART46VD17 Super Narrow Seam DID LCD Unit is the ideal display for a seamless video wall, at very affordable price. This product series is designed to have a super narrow seam, suitable for the construction of video wall of any size. It is definitely an invaluable assets in applications like command centers, control rooms, conference rooms, etc...



Application

- Command Centre
- Control Room
- Conference Room
- Retail Store
- Restaurant
- Museum

· Super Narrow Combined Seam of 1.7mm



· Intelligent Split Screen



· Golden Ratio: 16:9




· Ultra Wide Viewing Angle



178° Viewing Angle

<i>Model</i>	<i>ART46VD17</i>
<i>Parameter</i>	
<i>Screen Size (mm)</i>	1020 x 575 x 113mm
<i>Image Aspect Ratio</i>	16 : 9
<i>Both Sides Splicing Gap</i>	1.7mm
<i>Optimum Resolution (Pixel)</i>	1920 x 1080pixel
<i>Compatible Resolution (Pixel)</i>	1920 x 1080; 1600 x 1200; 1366 x 768; 1280 x 1024; 1280 x 768; 1024 x 768pixel
<i>Dot Pitch (mm)</i>	0.53mm
<i>Response Time (ms)</i>	8ms
<i>Display Color</i>	10bit, 16.7m
<i>Brightness (cd/m²)</i>	500cd/m ²
<i>Contrast Ratio</i>	40000 : 1
<i>Color Temperature (k)</i>	10000k
<i>Viewing Angle (H/V)</i>	178° / 178°
<i>Backlight</i>	WLED
<i>Power</i>	AC100V ~ 240V, 50/60Hz, Universal, ±10%
<i>Power Dissipation (W)</i>	230W (Normal Working Status)
<i>Life Time (50% Brightness)(Hours)</i>	60000Hours
<i>Machine Weight (kg)</i>	21kg
<i>Signal Interface</i>	AV, VGA, DVI, HDMI, YPbPr, USB
<i>Temperature (C)</i>	Working Temperature: 0C~50C, Storage Temperature: -20 C~70C
<i>Standard Fitting</i>	Power Cable
<i>Optional Fitting</i>	Cabinet, Wall-mounting, Floor Stand

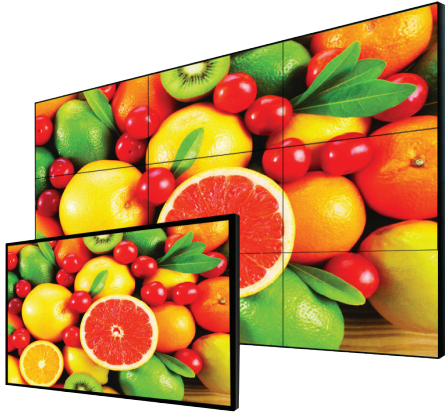

ARTISTRY - ART46VD17超窄边DID LCD单元是并接无缝视频墙的理想显示器，价格非常实惠。此产品系列设计具有超窄缝，适用于任何尺寸的视频墙施工。它绝对是指挥中心、控制室、会议室等应用中的理想选择。



应用

- 指挥中心
- 控制室
- 会议室
- 零售商店
- 餐厅
- 博物馆

· 超窄缝组合仅宽1.7mm



· 智能分屏



· 黄金比例：16：9



· 超宽视角



178° 可视角度

型号	ART46VD17
参数	
屏幕尺寸 (mm)	1020 x 575 x 113mm
图象长宽比	16 : 9
双边拼缝	1.7mm
最佳分辨率 (点)	1920 x 1080点
兼容分辨率 (点)	1920 x 1080; 1600 x 1200; 1366 x 768; 1280 x 1024; 1280 x 768; 1024 x 768点
点距 (mm)	0.53mm
响应时间 (ms)	8ms
显示颜色	10bit, 16.7m
亮度 (cd/m ²)	500cd/m ²
对比度	40000 : 1
色温 (k)	10000k
可视角度 (H/V)	178° / 178°
背光源	WLED
电源	AC100V ~ 240V, 50/60Hz, 普遍, ±10%
功耗 (W)	230W(正常工作状态)
使用寿命 (50%亮度) (小时)	60000小时
整机重量 (kg)	21kg
信号接口	AV, VGA, DVI, HDMI, YPbPr, USB
温度 (°C)	工作温度: 0°C~50°C, 储存温度: -20°C~70°C
标准配件	电源线
可选配件	机柜式、壁挂式、落地式